


P510 Series Installation Guide

Wiring and Circuit Diagram

Models P510

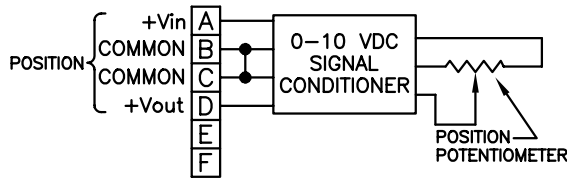


Excitation Voltage 11 to 35 VDC
 Excitation Current 40 mA max.
 Output Impedance 10 Ω max.
 Output Load 5K Ω min.

As shown in the diagram above, both commons on pins "B" and "C" are connected together internally at the transducer, so that either a 3-wire or 4-wire connection to the transducer may be made. With small blade type screwdriver (.105" max. blade width X .023" max. blade thickness), adjust the Zero and Span controls on the transducer to set zero output voltage and maximum output voltage. **Note:** The Zero and Span controls are somewhat interactive and may require several iterations to obtain the desired zero and maximum settings.


Extend the cable (on angular position transducers, rotate shaft) of the transducer to the desired zero position (must be within 0% to 30% of range.) Adjust the Zero control so that the output voltage is zero. Then extend the cable (on angular position transducers, rotate shaft) to the desired maximum position (must be within 80% to 100% of range.) Adjust the Span control for maximum output voltage required (unit will adjust from 5 VDC to 10 VDC). Recheck the zero setting and adjust if necessary. Recheck the Span setting and readjust if necessary.

Dimensional Information

Ranges to 50" (1250 mm)

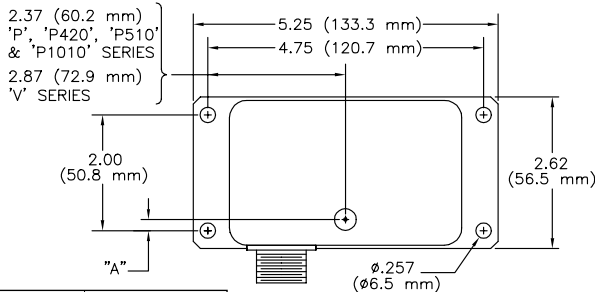

Range	"A" (in.)	"A" (mm.)
2", 10"	0.66	16.8
3", 15", 30"	0.51	12.9
4", 20", 40"	0.35	8.8
5", 25", 50"	0.19	4.8


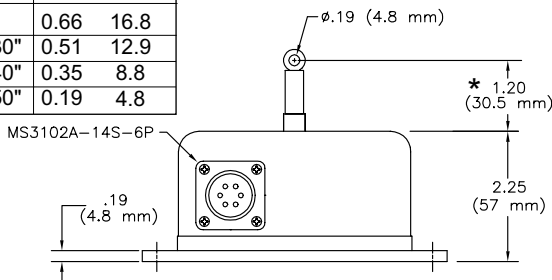


* 1.56 (39.6 mm) with "DS" option.

[Click Here for CES \(Cable Exit Side\) Option.](#)

[Click Here for CEB \(Cable Exit Bottom\) Option.](#)

Ranges to 80" (2000 mm)

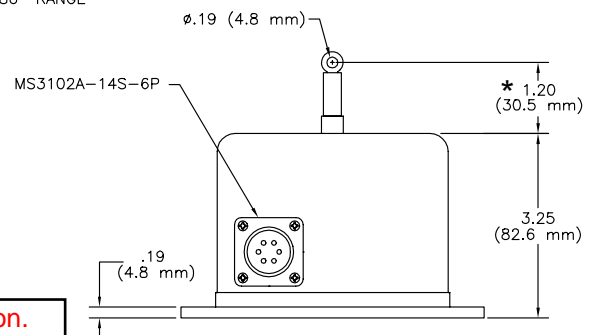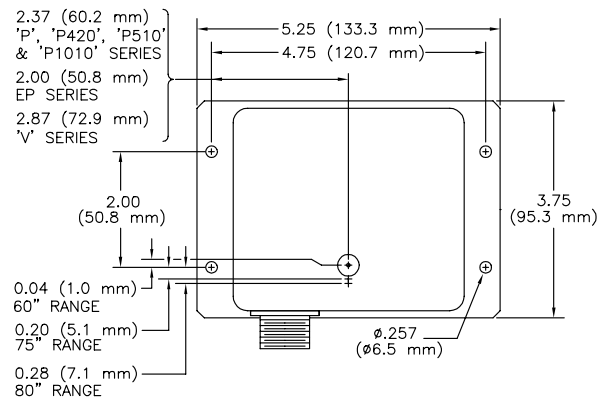

* 1.56 (39.6 mm) with "DS" option.